Performance parameters — Standard

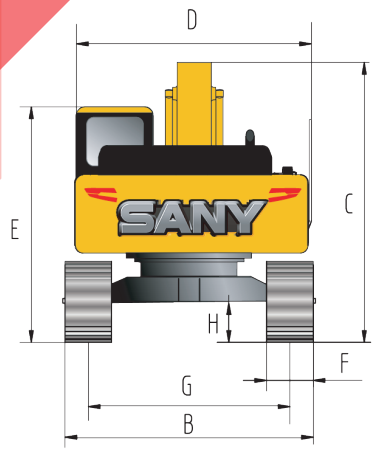

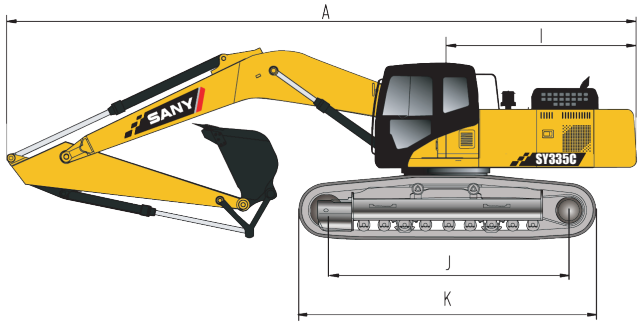

Operating weight	34300kg
Bucket capacity	1.5(HD)/1.65(HD)/1.8m³
Rated power	190.5kW/2000rpm
Travel speed(High/Low)	5.2/3.4km/h
Swing speed	10.5rpm
Gradeability	70%/35°
Pressure to the ground	62kPa
Bucket digging ability	220kN
Excavating force	170kN

Overall dimensions (mm) — Standard

A Transport Length	11100
B Transport width	3190
C Transport height	3600
D Upper body width	3145
E Overall height	3085
F Width of Std. track shoe	600
G Track gauge	2590
H Ground clearance	550
I Tail swing radius	3300
J Track length on ground	4140
K Track overall length	5080

Operation range: mm — Standard

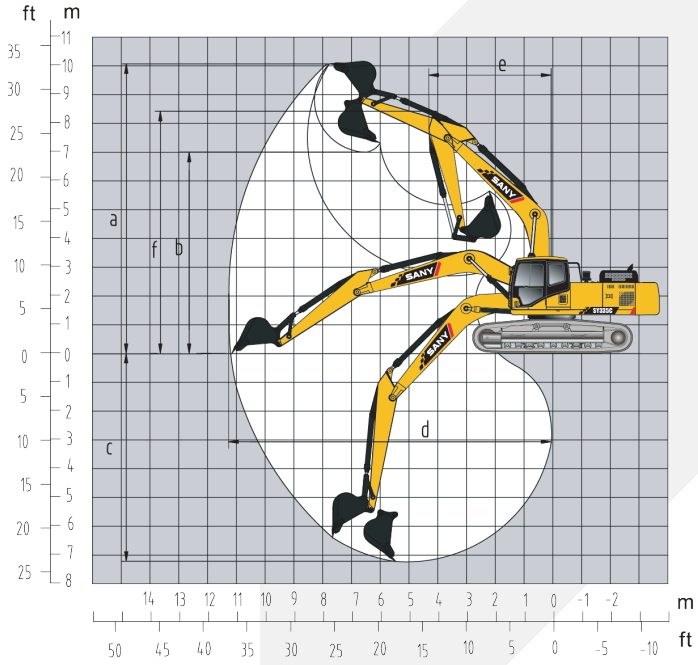

a Max. digging height	10100
b Max. dumping height	7025
c Max. digging depth	7410
d Max. vertical wall digging depth	6170
e Max. digging reach	11050
f Min. swing radius	4450
g Max. height at min. swing radius	8500

SANY Heavy Machinery Co., Ltd.

Sany Industry Town, Economical and Technological Development Zone, Kunshan,Jiangsu ,China
Consultation/Complaints Hotline: 4008-28-2333
After-sales Service Hotline: 4008-28-2318
Zip Code: 215300
Tel:0086-0512-5783 1902
Fax:0086-0512-5783 1999-11102
Web: http://www.sany.com.cn

Note: Materials and specifications are subject to change without further notice in accordance with our continuous technical innovations. Photos and illustrations may or may not include additional equipments.

ZJSYX0224CH (February, 2022) Printed in CHINA